

**5003F**

Size: D660\*H1900mm

Material: Aluminum+Metal+PMMA

Power: 35W

LED: Bridgelux SMD, CRI > 90

Beam Angle: 120°


Driver: TUV/SAA Cert. approved

Input Voltage: 220-240Vac/50/60Hz

Dim-to-warm (1800K-3000K)

All cables are with VDE/SAA certification requirements.



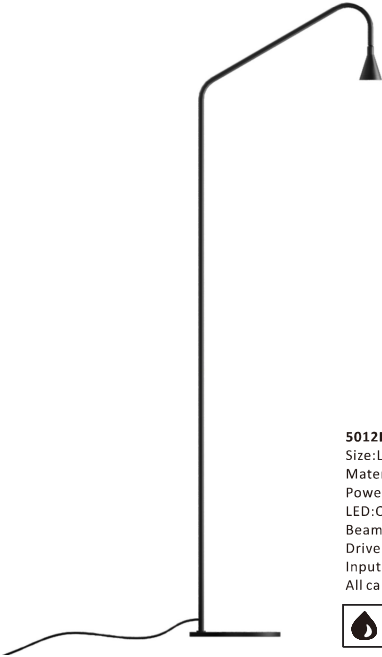


**5012F**  
 Size: L420xW200xH1400mm  
 Material: Steel + Aluminum  
 Power: 5W  
 LED: OSRAM COB, CIR > 95  
 Beam Angle: 5°/24°/36°/50°  
 Driver: CE/TUV/SAA Cert. approved  
 Input Voltage: 220-240Vac/50/60Hz  
 All cables are with VDE/SAA certification requirements.




**5012P**  
 Size: D70x2065mm (cable adjustable 1500mm)  
 Material: Steel + Aluminum  
 Power: 5W  
 LED: OSRAM COB, CIR > 95  
 Beam Angle: 5°/24°/36°/50°  
 Driver: CE/TUV/SAA Cert. approved  
 Input Voltage: 220-240Vac/50/60Hz  
 All cables are with VDE/SAA certification requirements.



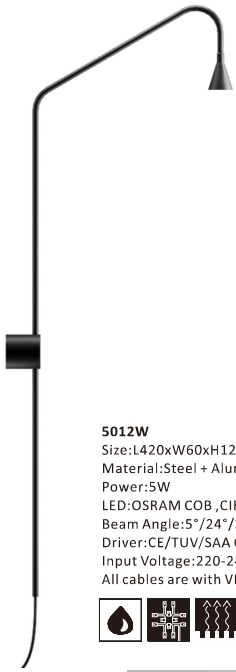

**5012W**


Size:L420xW60xH1200mm  
 Material:Steel + Aluminum  
 Power:5W  
 LED:OSRAM COB ,CIR>95  
 Beam Angle:5°/24°/36°/50°  
 Driver:CE/TUV/SAA Cert. approved  
 Input Voltage:220-240Vac/50/60Hz  
 All cables are with VDE/SAA certification requirements.

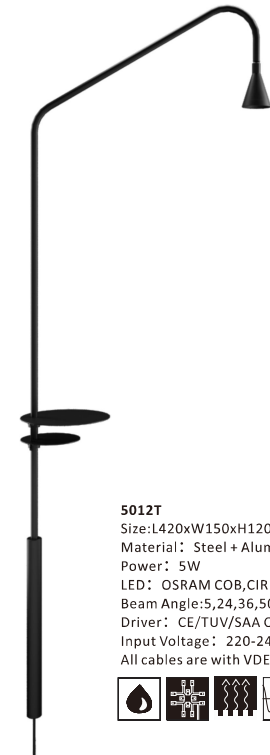


**5012T**

Size:L420xW150xH1200mm  
 Material: Steel + Aluminum  
 Power: 5W  
 LED: OSRAM COB,CIR>95  
 Beam Angle:5,24,36,50  
 Driver: CE/TUV/SAA Cert. approved  
 Input Voltage: 220-240Vac/50/60Hz  
 All cables are with VDE/SAA certification requirements.




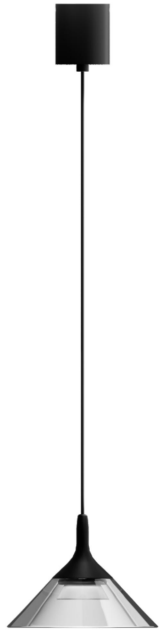


**5001P**  
Size: D200\*H1800mm (cable adjustable 1500mm)  
Material: Aluminum+Glass  
Power: 7W  
LED: Bridgelux COB, CIR > 95  
Beam Angle: 30°  
Driver: TUV/SAA Cert. approved  
Input Voltage: 220-240Vac/50/60Hz  
All cables are with VDE/SAA certification requirements.

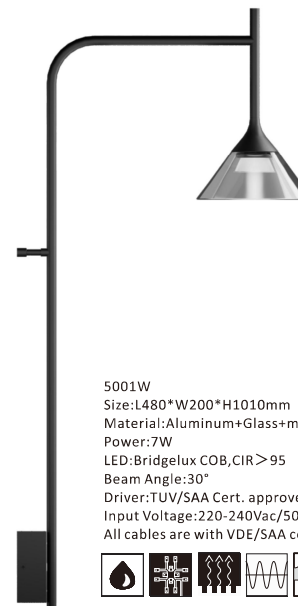


**5001W**  
Size: L480\*W200\*H1010mm  
Material: Aluminum+Glass+metal  
Power: 7W  
LED: Bridgelux COB, CIR > 95  
Beam Angle: 30°  
Driver: TUV/SAA Cert. approved  
Input Voltage: 220-240Vac/50/60Hz  
All cables are with VDE/SAA certification requirements.

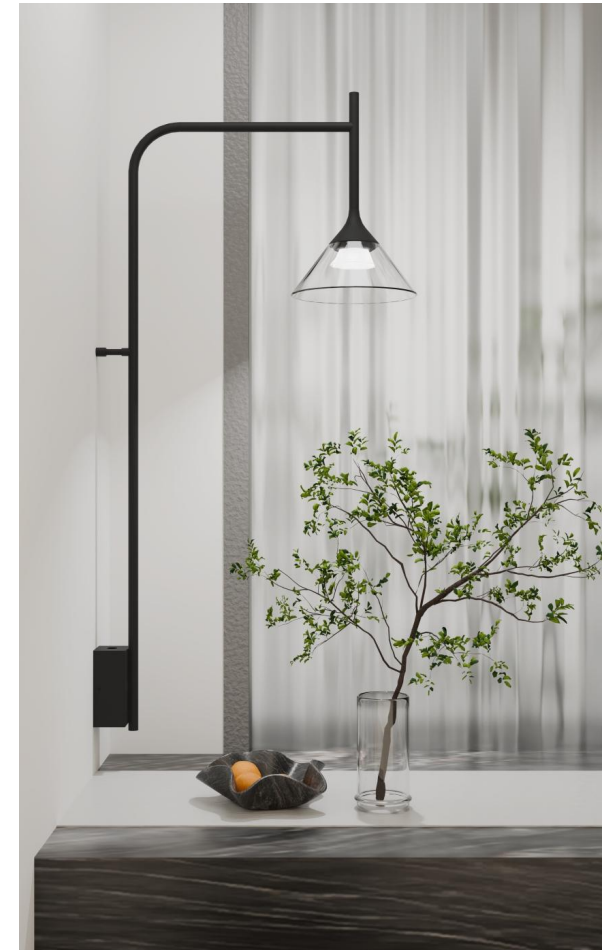

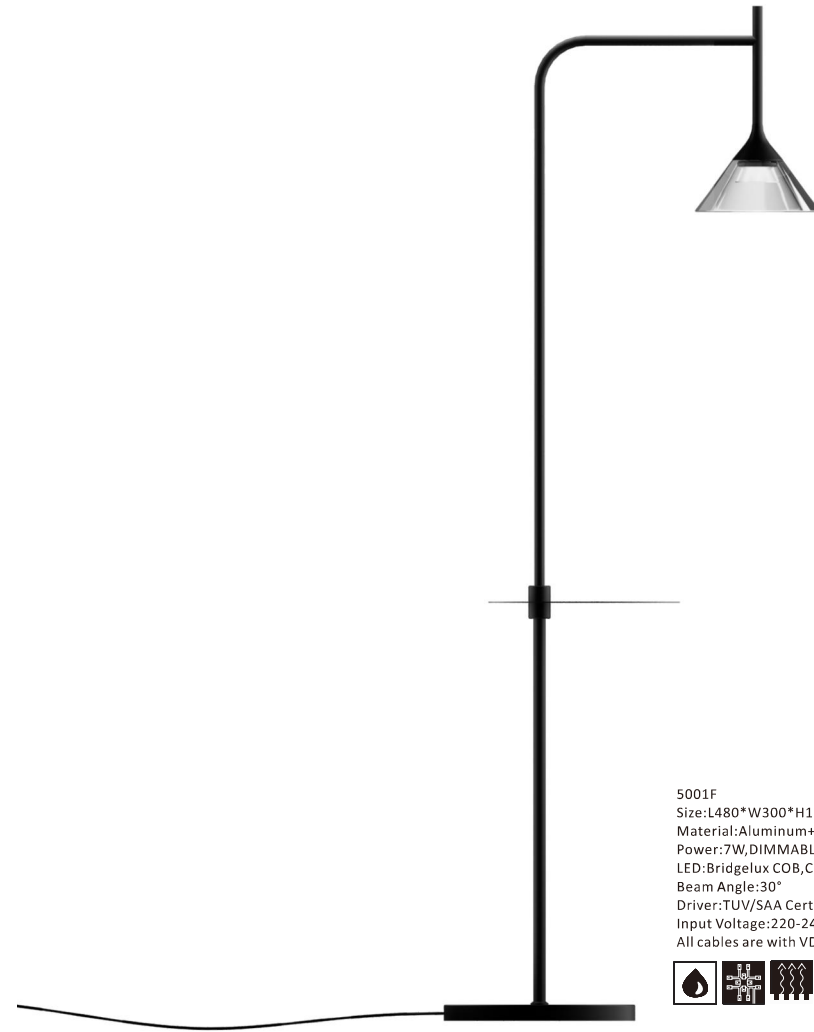


5001F  
Size:L480\*W300\*H1590mm  
Material:Aluminum+Glass+Metal  
Power:7W,DIMMABLE  
LED: Bridgelux COB,CIR>95  
Beam Angle:30°  
Driver:TUV/SAA Cert. approved  
Input Voltage:220-240Vac/50/60Hz  
All cables are with VDE/SAA certification requirements.



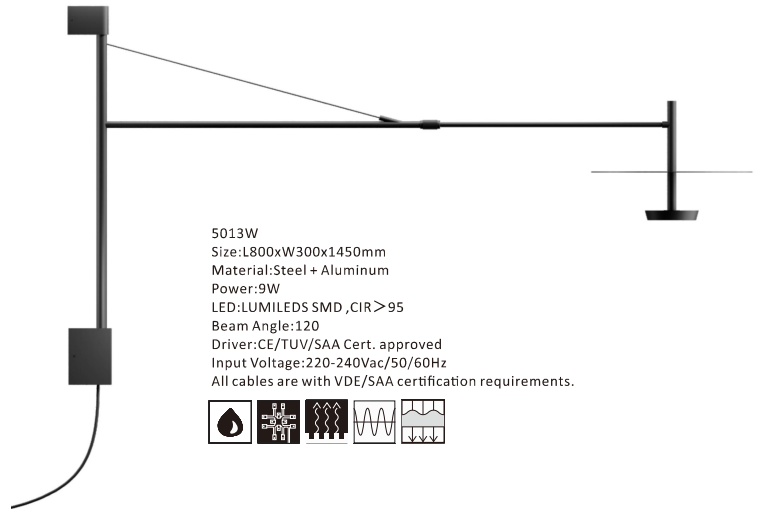


5013W  
 Size:L800xW300x1450mm  
 Material:Steel + Aluminum  
 Power:9W  
 LED:LUMILEDS SMD ,CIR>95  
 Beam Angle:120  
 Driver:CE/TUV/SAA Cert. approved  
 Input Voltage:220-240Vac/50/60Hz  
 All cables are with VDE/SAA certification requirements.

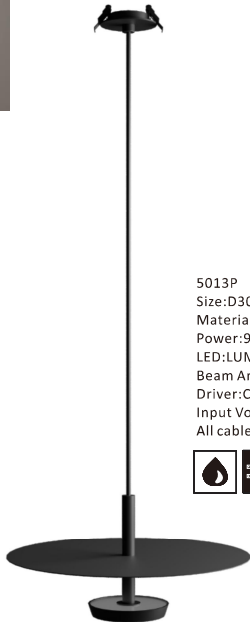


5013P  
 Size:D300x1740mm(cable adjustable 1500mm)  
 Material:Steel + Aluminum  
 Power:9W  
 LED:LUMILEDS SMD ,CIR>95  
 Beam Angle:120  
 Driver:CE/TUV/SAA Cert. approved  
 Input Voltage:220-240Vac/50/60Hz  
 All cables are with VDE/SAA certification requirements.



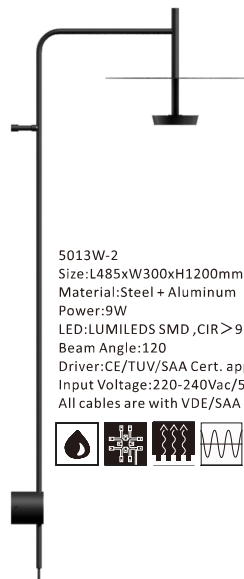


5013W-2  
 Size:L485xW300xH1200mm  
 Material:Steel + Aluminum  
 Power:9W  
 LED:LUMILEDS SMD ,CIR>95  
 Beam Angle:120  
 Driver:CE/TUV/SAA Cert. approved  
 Input Voltage:220-240Vac/50/60Hz  
 All cables are with VDE/SAA certification requirements.

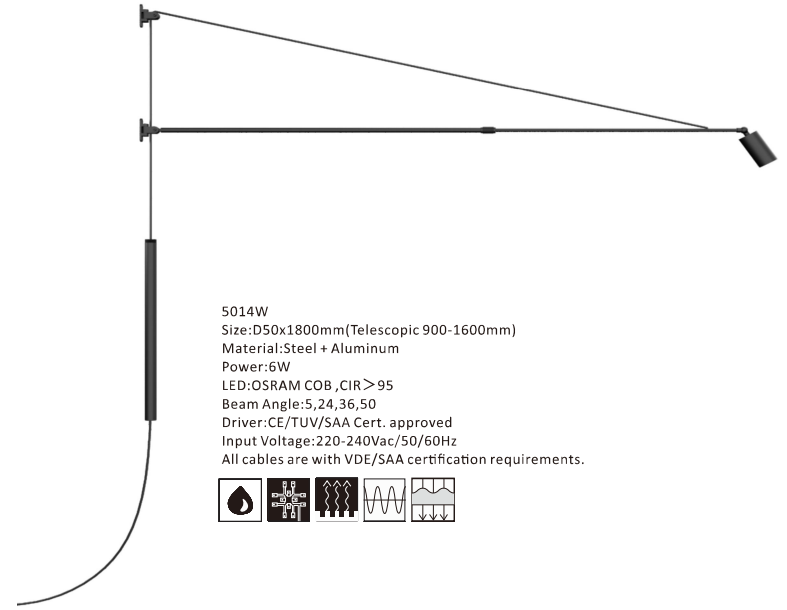

5014W  
 Size:D50x1800mm(Telescopic 900-1600mm)  
 Material:Steel + Aluminum  
 Power:6W  
 LED:OSRAM COB ,CIR>95  
 Beam Angle:5,24,36,50  
 Driver:CE/TUV/SAA Cert. approved  
 Input Voltage:220-240Vac/50/60Hz  
 All cables are with VDE/SAA certification requirements.



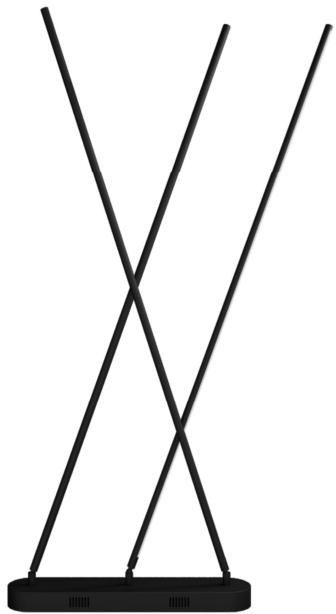

5017F  
 Size:L500xW100xH1290mm  
 Material:Steel + Aluminum  
 Power:36W  
 LED:LUMILEDS SMD ,CRI95  
 Beam Angle:120  
 Driver:CE/TUV/SAA Cert. approved  
 Input Voltage:220-240Vac/50/60Hz  
 All cables are with VDE/SAA certification requirements



6001P  
 Size: D120\*H3800mm,  
 Material: Aluminum  
 Power: 12W  
 LED: LUMILEDS,CRI>90  
 Beam angle: 110°  
 Driver: EAGLERISE, CE/TUV/SAA Cert. approved  
 Input Voltage: 220-240Vac/50/60Hz  
 All cables are with CE/VDE/SAA certification requirements.

