


5003F
 Size: D660*H1900mm
 Material: Aluminum+Metal+PMMA
 Power: 35W
 LED: Bridgelux SMD, CRI > 90
 Beam Angle: 120°
 Driver: TUV/SAA Cert. approved
 Input Voltage: 220-240Vac/50/60Hz
 Dim-to-warm (1800K-3000K)
 All cables are with VDE/SAA certification requirements.






5012F
 Size: L420xW200xH1400mm
 Material: Steel + Aluminum
 Power: 5W
 LED: OSRAM COB, CIR > 95
 Beam Angle: 5°/24°/36°/50°
 Driver: CE/TUV/SAA Cert. approved
 Input Voltage: 220-240Vac/50/60Hz
 All cables are with VDE/SAA certification requirements.

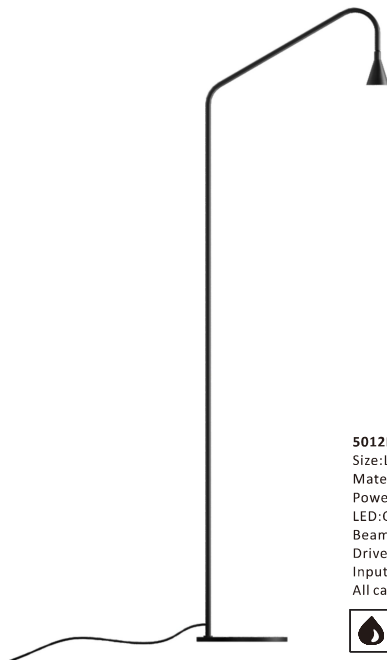

5012P
 Size: D70x2065mm(cable adjustable 1500mm)
 Material: Steel + Aluminum
 Power: 5W
 LED: OSRAM COB, CIR > 95
 Beam Angle: 5°/24°/36°/50°
 Driver: CE/TUV/SAA Cert. approved
 Input Voltage: 220-240Vac/50/60Hz
 All cables are with VDE/SAA certification requirements.



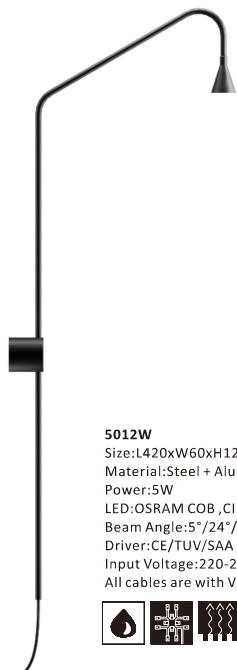

5012W

Size: L420xW60xH1200mm

Material: Steel + Aluminum

Power: 5W



LED: OSRAM COB, CIR > 95

Beam Angle: 5°/24°/36°/50°

Driver: CE/TUV/SAA Cert. approved

Input Voltage: 220-240Vac/50/60Hz

All cables are with VDE/SAA certification requirements.

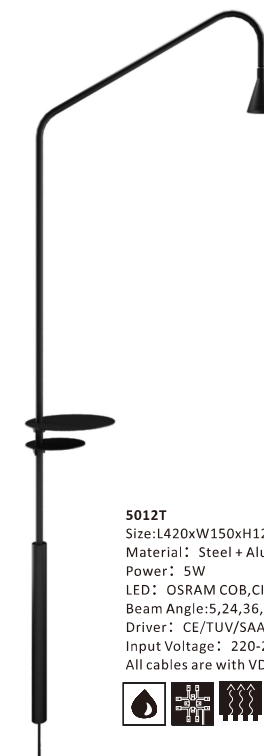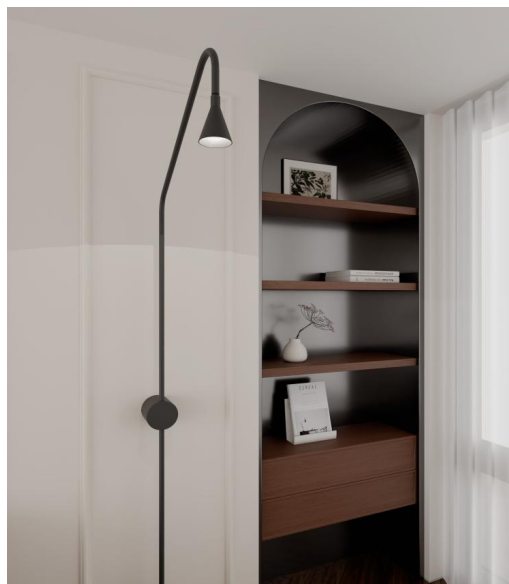

5012T

Size: L420xW150xH1200mm

Material: Steel + Aluminum

Power: 5W

LED: OSRAM COB, CIR > 95

Beam Angle: 5, 24, 36, 50

Driver: CE/TUV/SAA Cert. approved


Input Voltage: 220-240Vac/50/60Hz

All cables are with VDE/SAA certification requirements.






5001P
 Size: D200*H1800mm(cable adjustable 1500mm)
 Material: Aluminum+Glass
 Power: 7W
 LED: Bridgelux COB, CRI > 95
 Beam Angle: 30°
 Driver: TUV/SAA Cert. approved
 Input Voltage: 220-240Vac/50/60Hz
 All cables are with VDE/SAA certification requirements.

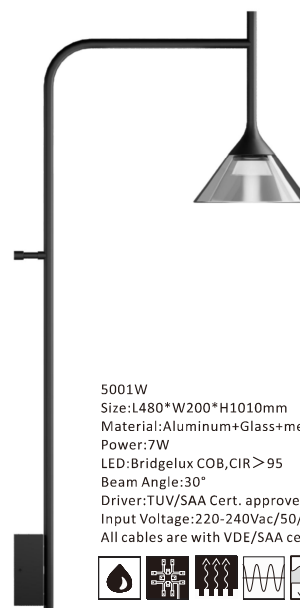


5001W
 Size: L480*W200*H1010mm
 Material: Aluminum+Glass+metal
 Power: 7W
 LED: Bridgelux COB, CRI > 95
 Beam Angle: 30°
 Driver: TUV/SAA Cert. approved
 Input Voltage: 220-240Vac/50/60Hz
 All cables are with VDE/SAA certification requirements.



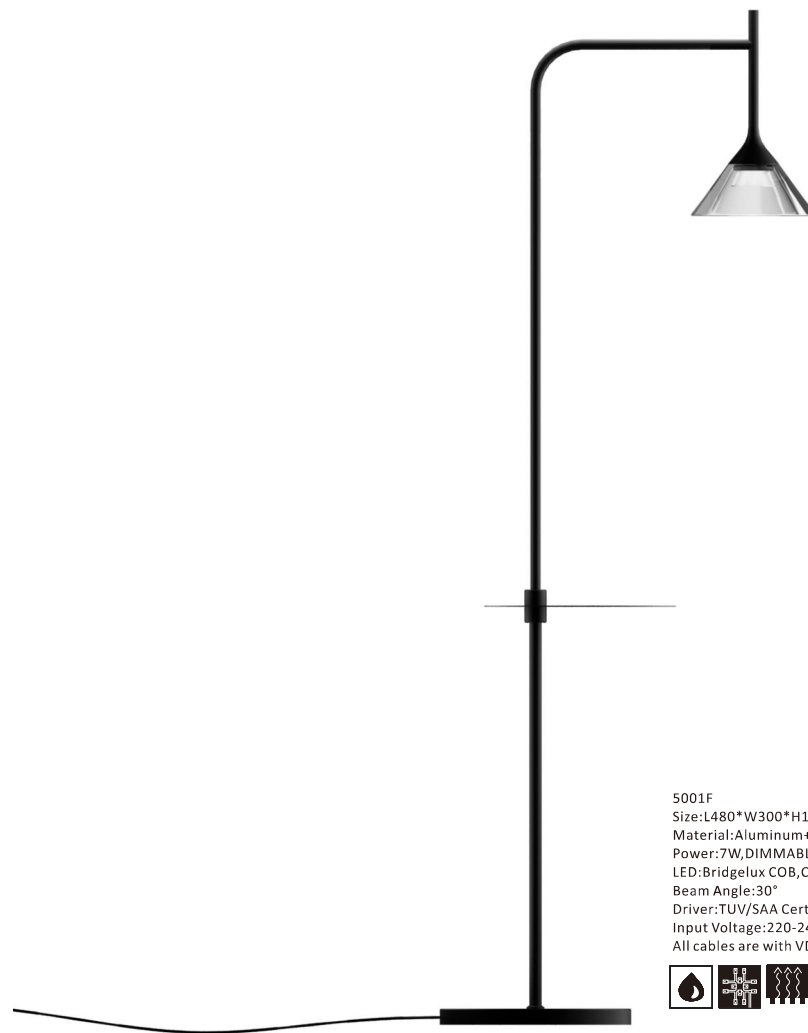


5001F
 Size: L480*W300*H1590mm
 Material: Aluminum+Glass+Metal
 Power: 7W, DIMMABLE
 LED: Bridgelux COB, CRI > 95
 Beam Angle: 30°
 Driver: TUV/SAA Cert. approved
 Input Voltage: 220-240Vac/50/60Hz
 All cables are with VDE/SAA certification requirements.



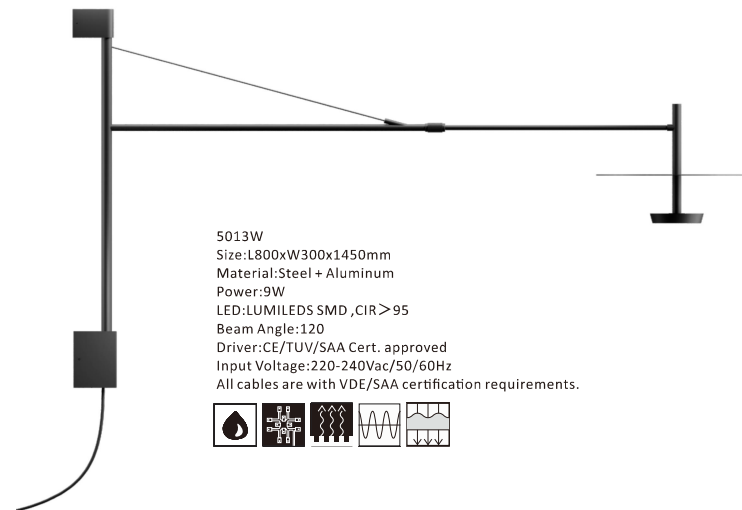


5013W
 Size:L800xW300x1450mm
 Material:Steel + Aluminum
 Power:9W
 LED:LUMILEDS SMD ,CIR>95
 Beam Angle:120
 Driver:CE/TUV/SAA Cert. approved
 Input Voltage:220-240Vac/50/60Hz
 All cables are with VDE/SAA certification requirements.

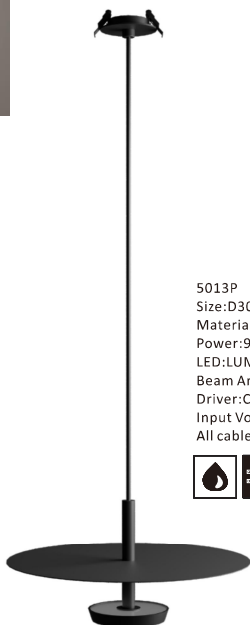


5013P
 Size:D300x1740mm(cable adjustable 1500mm)
 Material:Steel + Aluminum
 Power:9W
 LED:LUMILEDS SMD ,CIR>95
 Beam Angle:120
 Driver:CE/TUV/SAA Cert. approved
 Input Voltage:220-240Vac/50/60Hz
 All cables are with VDE/SAA certification requirements.



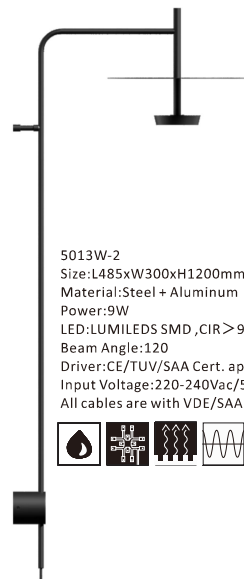


5013W-2
 Size: L485xW300xH1200mm
 Material: Steel + Aluminum
 Power: 9W
 LED: LUMILEDS SMD, CIR > 95
 Beam Angle: 120
 Driver: CE/TUV/SAA Cert. approved
 Input Voltage: 220-240Vac/50/60Hz
 All cables are with VDE/SAA certification requirements.

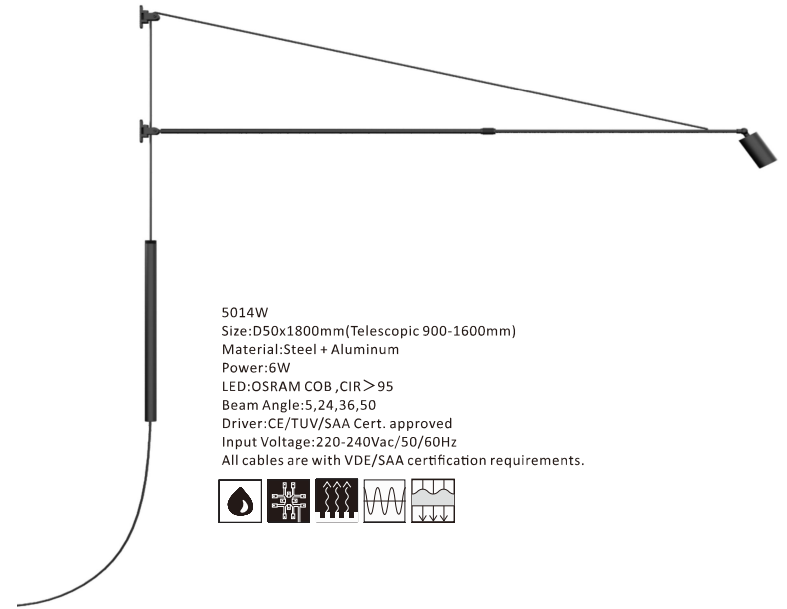

5014W
 Size: D50x1800mm (Telescopic 900-1600mm)
 Material: Steel + Aluminum
 Power: 6W
 LED: OSRAM COB, CIR > 95
 Beam Angle: 5, 24, 36, 50
 Driver: CE/TUV/SAA Cert. approved
 Input Voltage: 220-240Vac/50/60Hz
 All cables are with VDE/SAA certification requirements.



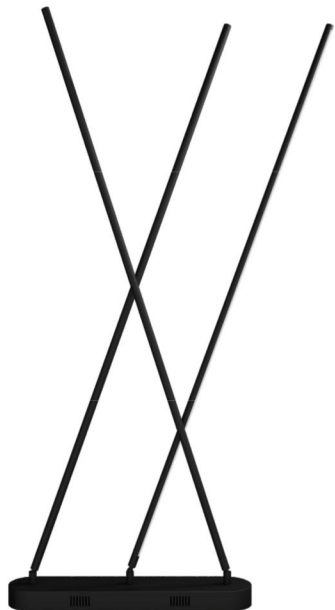

5017F
 Size: L500xW100xH1290mm
 Material: Steel + Aluminum
 Power: 36W
 LED: LUMILEDS SMD, CRI95
 Beam Angle: 120
 Driver: CE/TUV/SAA Cert. approved
 Input Voltage: 220-240Vac/50/60Hz
 All cables are with VDE/SAA certification requirements



6001P
 Size: D120*H3800mm,
 Material: Aluminum
 Power: 12W
 LED: LUMILEDS, CRI > 90
 Beam angle: 110°
 Driver: EAGLERISE, CE/TUV/SAA Cert. approved
 Input Voltage: 220-240Vac/50/60Hz
 All cables are with CE/VDE/SAA certification requirements.

